



FS-400 SERIES

Stainless Steel Vertical Float Switches



Series FS-400 Stainless Steel Vertical Float Switches are durable float switches with CSA and NSF certifications and a wide range of applications. Their compact size — less than 3.5" from top of threads to end of stem — all stainless steel wetted materials, and user-reversible switch orientation, make them an easy choice for OEM, water and wastewater, and chemical applications.

FEATURES

- Compact size
- Reliability/long switch life
- Shock resistive construction
- Can be used in a wide range of liquids
- Operating temperatures up to 500° F (260° C)
- Switch rated for 100 W
- NSF 169 certified
- CSA Explosion Proof (Standard Temp) and General Use (High Temp)

FS-400 SPECIFICATIONS

SERIES

FS-400

Model

FS-400-S

FS-400-HT

Switch action for the FS-400 is reversible.
Standard is NO, user reversible for NC.

PERFORMANCE

Pressure Rating	200 psi (13.8 bar)	500 psi (34.5 bar)
Maximum S.G.	0.6	
N.O. Actuation	0.220" ± 0.05" (5.59 mm ± 1.27 mm)	
N.C. Actuation	0.160" ± 0.05" (4.06 mm ± 1.27mm)	
Hysteresis	0.070" ± 0.02" (1.78 mm ± .51 mm)	

ENVIRONMENTAL

Operating Temp.	-40° to 368°F (-40° to 187°C)	-40° to 500°F (-40° to 260°C)
Liquids	Chemicals, Food, Potable Water	

ELECTRICAL

Switch Rating		
Max Capacity	100 W (resistive load only)	
Max Current (AC, 50/60 Hz)	240 VAC: 0.416 A; 120 VAC: 0.833 A; ≤100 VAC: 1 A	
Max Current (DC)	120 VDC: 0.833 A; ≤100 VDC: 1 A	
Life Expectancy	10 ⁶ to 10 ⁸ (# of actuations; dependent on load)	
Lead Wires	#22 AWG, PTFE 24 to 99 in. (610 to 2515 mm)	

PHYSICAL

Material		
Stem	316L SS	
Float	316L SS	
Retainer	316L SS	
Mounting	Vertical	

CERTIFICATION

CSA/cCSAus Contract #237484	Explosion Proof	General Use
	Class I, Div 1 & 2, Groups A, B,C, & D, T3	—
	Class II, Div. 1, Groups E, F, T200°C	—
	Class II, Div. 2, Groups F, G, T200°C	—
	Class III	—
	Ta -40° C to 187° C	—
Single Seal		
NSF 169	Yes	
Enclosure Rating	NEMA 4X	


COMMON MODEL CONFIGURATIONS

MODEL NUMBER	MODEL DESCRIPTION
FS-400-S-M1-M1-0.6-P0-24	Stainless Steel Stem and Float, Standard Temperature , 0.6 SG, 1/4" NPTM, 24" Wires
FS-400-HT-M1-M1-0.6-P0-24	Stainless Steel Stem and Float, High Temperature , 0.6 SG, 1/4" NPTM, 24" Wires
FS-400-S-M1-M1-0.6-P0-36	Stainless Steel Stem and Float, Standard Temperature , 0.6 SG, 1/4" NPTM, 36" Wires
FS-400-HT-M1-M1-0.6-P0-36	Stainless Steel Stem and Float, High Temperature , 0.6 SG, 1/4" NPTM, 36" Wires
FS-400-S-M1-M1-0.6-P0-48	Stainless Steel Stem and Float, Standard Temperature , 0.6 SG, 1/4" NPTM, 48" Wires
FS-400-HT-M1-M1-0.6-P0-48	Stainless Steel Stem and Float, High Temperature , 0.6 SG, 1/4" NPTM, 48" Wires

FS-400 REPLACEMENTS / ACCESSORIES

Please order separately, by part number.

DESCRIPTION	PART NUMBER
2" Float, 316 SS, Standard Temp; Quantity 5	200326
2" Float, 316 SS, High Temp; Quantity 5	200327
E clip, 316 SS; Quantity 20	200328

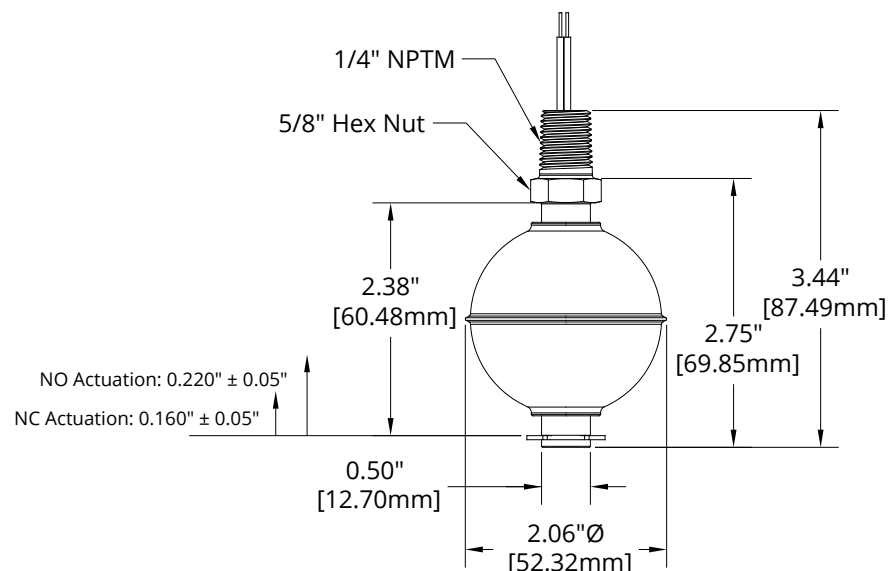

MODEL CONFIGURATION OPTIONS



MODEL NUMBER: FS-400 – $\frac{\quad}{A}$ – $\frac{M1}{B}$ – $\frac{M1}{C}$ – $\frac{0.6}{D}$ – $\frac{P0}{E}$ – $\frac{\quad}{F}$

A. Operating Temperature

- ☐ **S▲** Standard Range (-40 to 187°C)
- ☐ **HT** High Temperature Range (-40 to 260°C)

B. Stem Materials

- ☐ M1▲ 316 Stainless Steel

C. Float Material

- ☐ M1[▲] 316 Stainless Steel

D. Float Specific Gravity

- 0.6 Specific Gravity

E. Fitting Type

- PO 1/4" NPTM

F. Wire Length

- ☐ — Wire Length in Inches (24-99)

Note: *Indicates this option is only available with CSA General Purpose ratings.